

## SECTION RECORD CORNER

SECTION 31 TOWNSHIP 16 RANGE 5

DATE: 3-7-06

PARTY CHIEF: Wilcoxon

CREW:

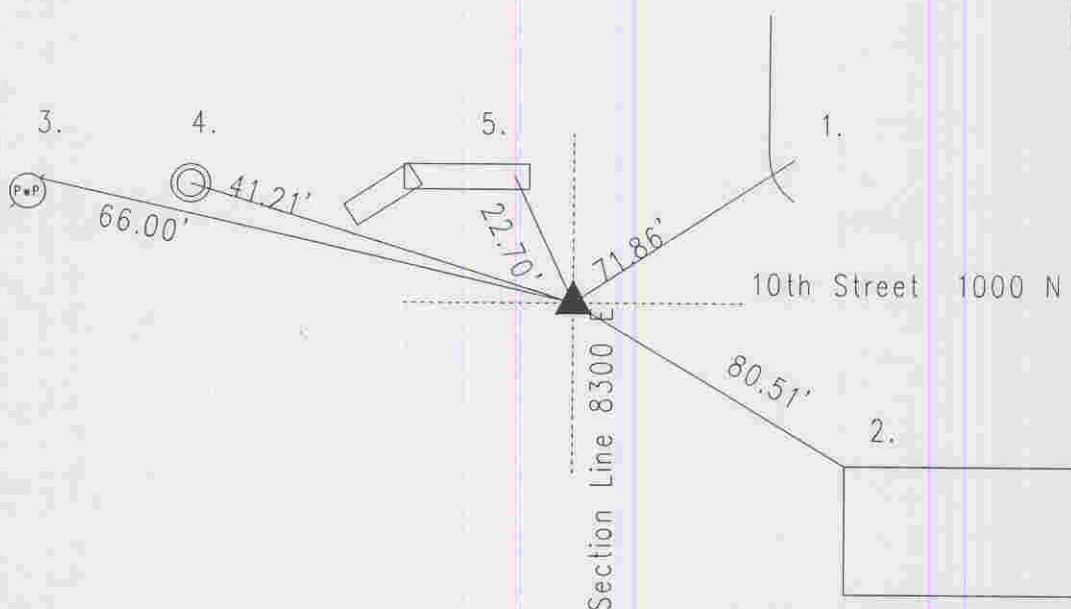
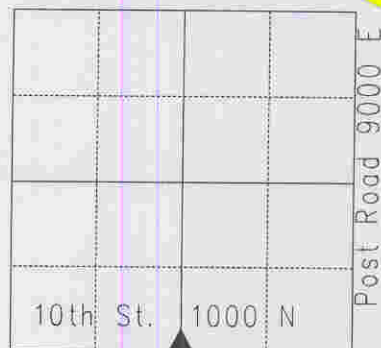
TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 11-2-00

IN. S.P.C. E ZONE NAD '83

NAME: 16053108

N: 503365.1360(m)

$$E: 69849.9052(\text{m})$$


Original post set 1820 by John Hendricks with witness: 20" sugar N 39 W 42 links; 18" dogwood S 38 W 34 links per Marion County Atlas pg. 15. Survey by O. W. Voorhis 11-15-1865 indicates no stone nor witness per Warren Township Legal Survey Book pg. 39. Survey in Legal Book indicates a brass marker in 8/1929. per Warren Township Legal Survey Book pg.39. Woerner 6-25-48 called a brass plug. Wilcoxon 3-16-87 called a brass plug. Wilcoxon 2-7-92 called a railroad spike over brass plug. Wilcoxon 6-22-97 called a railroad spike over brass plug. Excavated by Kiste 11-2-00 and railroad spike was found 2" down. A brass plug was found 8" down in concrete. Harrison set. Re-tied 3-7-06 by Wilcoxon. 16053108

REF.	DISTANCE	DESCRIPTION
1.	71.86'	Cut 'x' S-end of curb
2.	80.51'	NW corner of brick of house ADDRESS 8397
3.	66.00'	Mag nail w/bw NE PwP 168-560 12"up
4.	41.21'	Cut 'x' S end of rim of manhole
5.	22.70'	Cut 'x' E-end headwall